

450-470 Watt Module HC 96

Mono-Crystalline N Type
Dual Glass Bifacial Full Black
SE-182*105-450M-96-BD

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730

ISO 9001:2015: ISO Quality Management System

ISO 14001:2015: ISO Environment Management System

ISO 45001: Occupational Health and Safety

KEY FEATURES



Multi Busbar Solar Cell



High Efficiency



PID Resistance



Low-light Performance




Severe Weather Resilience



Durability Against Extreme Environmental Conditions





LINEAR PERFORMANCE WARRANTY

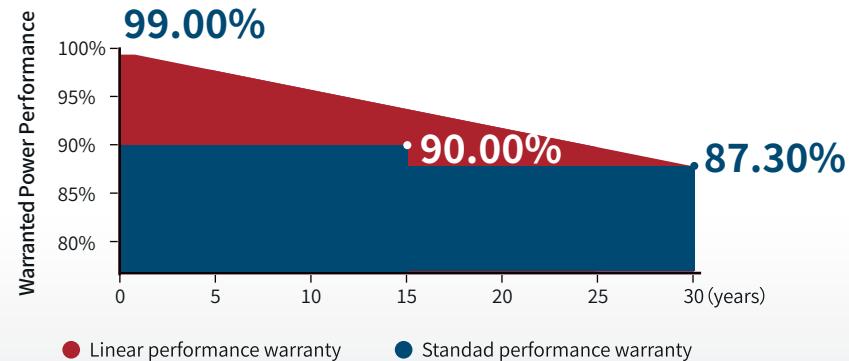

PACKAGING CONFIGURATION (Two pallets = One stack)

36 pcs/pallet, 72pcs/stack, 900pcs/53FT Truck

Drawings (Unit:mm)

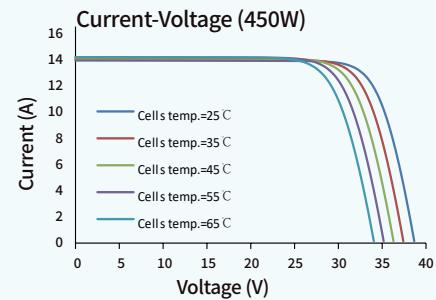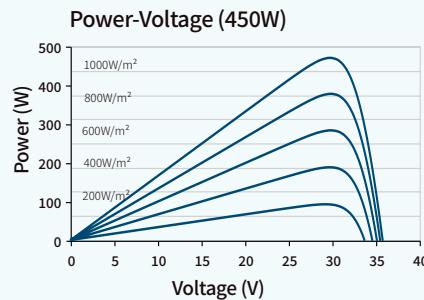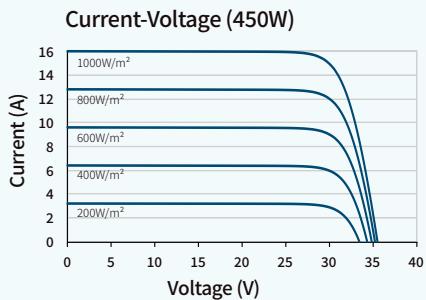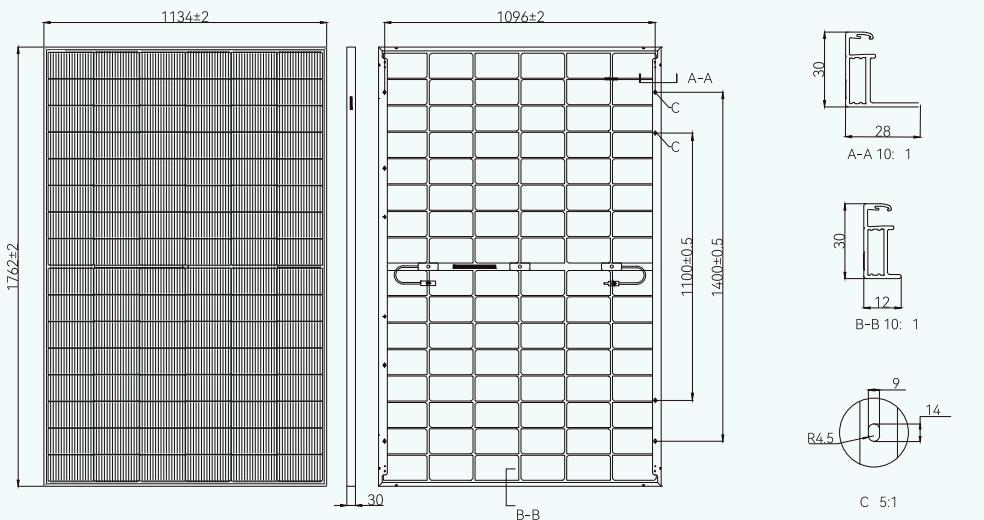

Mechanical Parameters

Cells	N-Type Mono-crystalline -
Cell Orientation	96[6x16]
Dimension	1762±2x1134±2x30mm
Weight	21.0kg
Front / Back Glass	1.6+1.6mm (0.063+0.063 inch)
Frame	Aluminum, Silver Anodized
Junction Box	IP68 Rated, MC4-EVO2A connector
Output Cable	TÜV 1x4.0mm²
Cable Length	1200mm or Customized Length
Wind /Snow Load	2400Pa/5400Pa
Fire Rating	UL: Type 1, IEC:Class C
Packaging	36pcs/pallet, 72pcs/stack, 900pcs/53FT Truck

Temperature Parameters

Temperature Coefficient (Pmax)	-0.30%/°C
Temperature Coefficient (Voc)	-0.25%/°C
Temperature Coefficient (Isc)	+0.046%/°C
NMOT	41±2°C

Maximum Ratings

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30 A
Power Output Tolerance	0~+3%

Electrical Characteristics(STC)

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5, Measuring Tolerance: ±3%

	450	455	460	465	470
Maximum Power:Pmax[W]	450	455	460	465	470
Open Circuit Voltage:Voc[V]	35.03	35.21	35.39	35.57	35.75
Short Circuit Current:Isc[A]	16.05	16.10	16.15	16.20	16.25
Voltage at Maximum Power:Vmp[V]	30.08	30.26	30.44	30.62	30.80
Current at Maximum Power:Imp[A]	14.97	15.04	15.11	15.19	15.26
Module Efficiency: η [%]	22.52	22.77	23.02	23.27	23.52

Electrical Characteristics(NMOT)

NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass 1.5, Wind Speed 1m/s

	338	342	346	349	353
Maximum Power:Pmax[W]	338	342	346	349	353
Open Circuit Voltage :Voc[V]	33.28	33.45	33.62	33.79	33.96
Short Circuit Current :Isc[A]	12.96	12.99	13.03	13.07	13.11
Voltage at Maximum Power:Vmp[V]	27.96	28.14	28.31	28.48	28.64
Current at Maximum Power:Imp[A]	12.09	12.15	12.22	12.26	12.32

Electrical Characteristics(Rear Power Gain)

	5%	15%	25%	473	478	483	488	494
Maximum Power:Pmax[W]	473	518	563	473	478	483	488	494
Module Efficiency: η [%]	23.65	25.90	28.15	23.91	26.19	27.78	24.17	24.44
Module Efficiency: η [%]	23.65	25.90	28.15	23.91	26.19	27.78	24.17	24.44
Maximum Power:Pmax[W]	518	529	569	523	529	575	535	541
Module Efficiency: η [%]	25.90	26.48	28.46	26.19	26.48	29.09	27.05	27.05
Maximum Power:Pmax[W]	563	581	588	529	535	581	588	588
Module Efficiency: η [%]	28.15	29.09	29.40	26.48	27.05	29.09	27.05	27.05